




ALLOWABLE LOADS FOR COLUMNS

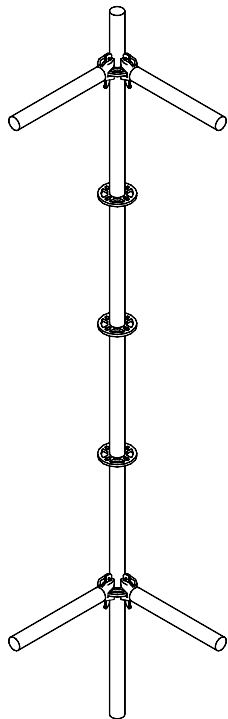

BRACED IN 2 DIRECTIONS

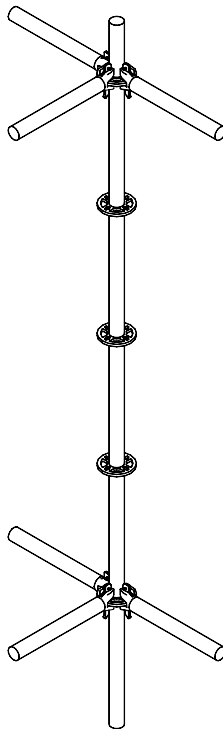

BRACED IN 3 DIRECTIONS

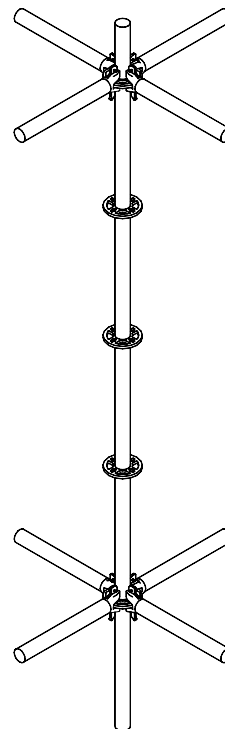

BRACED IN 4 DIRECTIONS

Allowable loads when used as scaffolding which requires a 4 to 1 safety factor

Distance between horizontals	2 Directions	3 Directions	4 Directions
6'-6"	4,500 lbs.	4,900 lbs.	5,400 lbs.
4'-10"	4,825 lbs.	5,350 lbs.	5,975 lbs.
2'-11"	5,130 lbs.	5,800 lbs.	6,550 lbs.