



ALLOWABLE LOADS FOR HORIZONTAL COMPONENTS

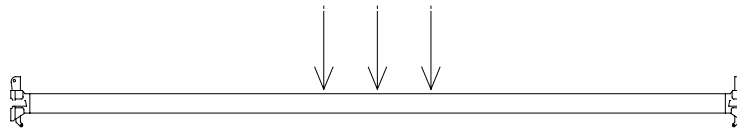

CENTER LOAD 4" WIDE

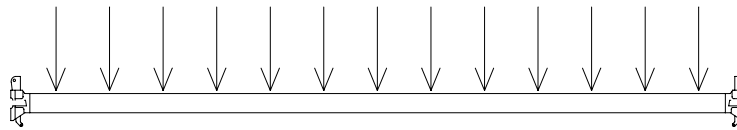

UNIFORM LOAD

LATERAL BRACING NOT REQUIRED

Part Number	Vertical Post Spacing	Center load	Uniform Load
UH20	2' - 0"	2500 lb.	750 plf
UH30	3' - 0"	2000 lb.	750 plf
UH36	3' - 6"	800 lb.	700 plf
UH40	4' - 0"	700 lb.	425 plf
UH50	5' - 0"	600 lb.	210 plf

LATERAL BRACING REQUIRED FOR TRUSS'S EQUIPPED WITH ROSETTES

Part Number	Vertical Post Spacing	Center Load	Uniform Load
UHT50	5' - 0"	1700 lb.	450 plf
UHT60	6' - 0"	1700 lb.	425 plf
UHT70	7' - 0"	1600 lb.	250 plf
UHT80	8' - 0"	1500 lb.	250 plf
UHT100	10' - 0"	1400 lb.	200 plf